Assembly instructions

Flexilinge – Hanger bar option

Fitting the hanger bar option takes less than 5 minutes.


You will need the following tools:

- 10mm spanner (open-ended or combination)
- 4mm hex key (Allen key)

If you need any help, contact us: contact@pleinairsolutions.fr – +33 6 35 97 84 36 – www.pleinairsolutions.fr

Step 1:


Check the contents of the accessory bag:

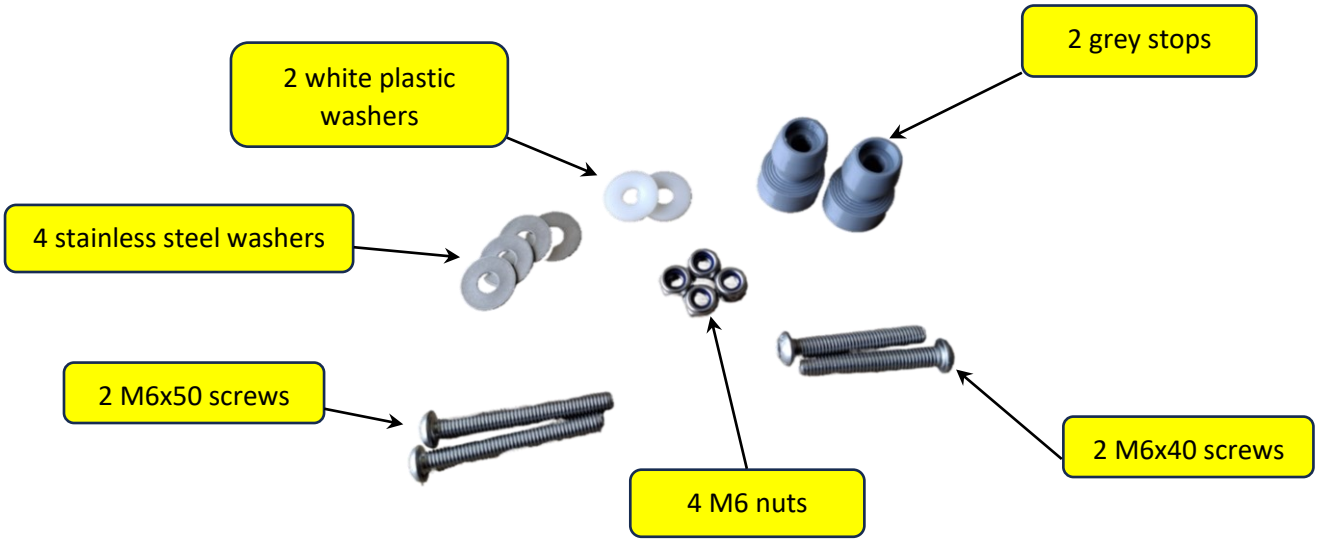

Step 2:


Take a hanger bar and fit it on the right as shown:



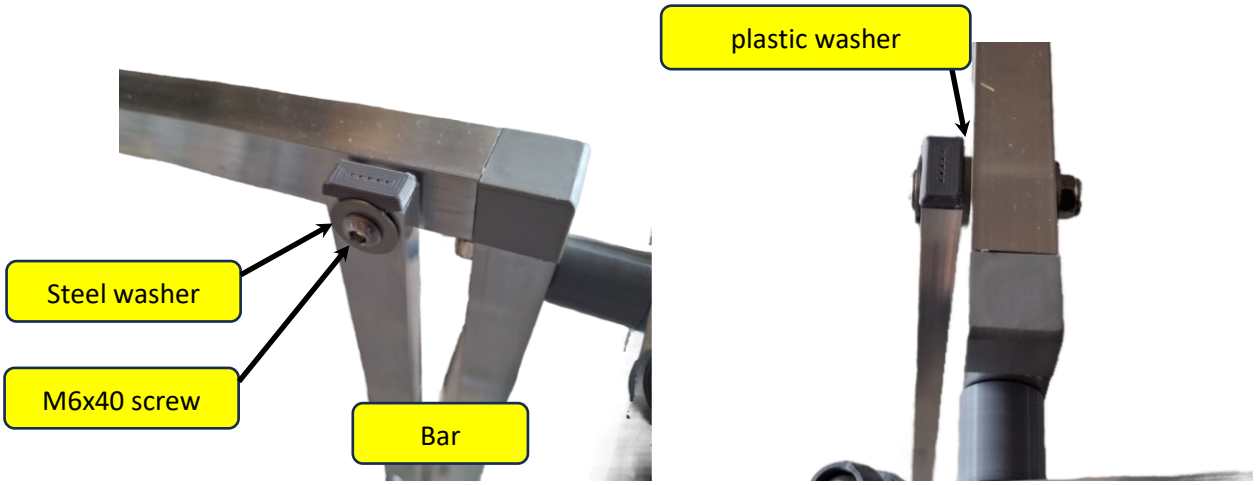

Step 3:

Fit a washer and a nut on the end. Do not overtighten, so that the bar can still swing freely:

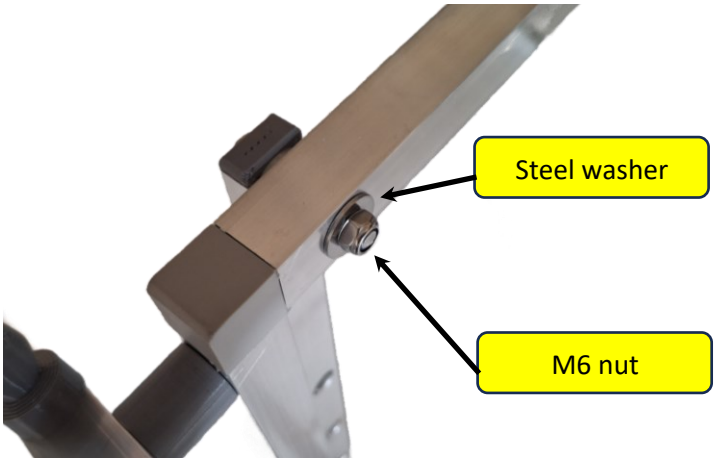



Step 4:

Do the same on the left, keeping the screw on the inside and the nut on the outside

Step 5:

Fit the end stops (you can fully tighten the nut):

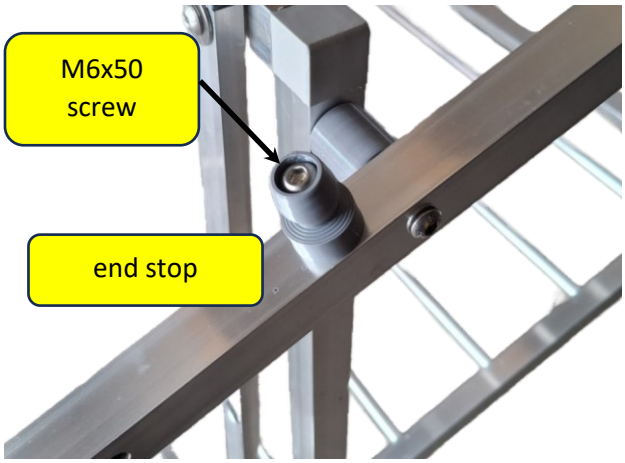

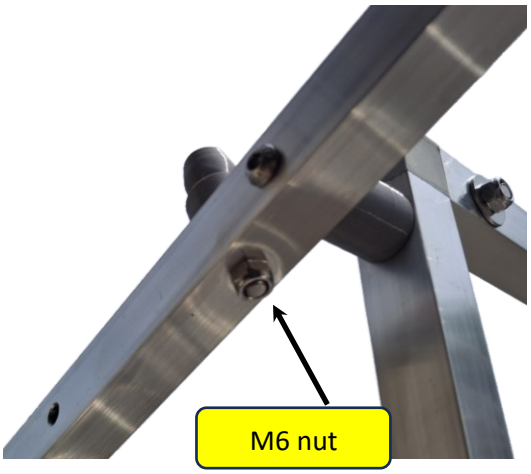



When you fold the Flexilinge to store it or move it through a doorway, make sure the hanger bars are swung inside. Never fold it with the bars sticking out.